

REMOTE → SEMI-VERTICAL MULTIDECKS

Everest 2.0 RNEV-21 DTO



STANDARD FEATURES

- working temperature: from -25°C to -21°C
- refrigerant: R744
- 2 x NTC temperature probe
- exposition: zinc-plated steel, powder coated in white (RAL 9003)
- 3 rows of suspended shelves, on shelves and on air inlet price holders 39 mm
- lighting: – LEDit vertical
- inox square bumper


OPTIONS

- electronic expansion valve
- sidewalls



Everest RNEV-21 1950 DTO

DTO — door | triple, straight | hinged

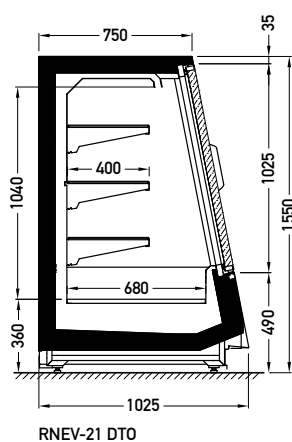

AVAILABLE MODULES

1950

JBG-2 Sp. z o.o. reserves the right to change the standards of devices or to withdraw products without prior notice.

Designation of the energy efficiency class is dedicated to a particular products, which are presented on each page of the catalogue. Indicated energy efficiency class depends on a module type, equipment, glassing version and type of a refrigerant. Amendment of each of the said parameters may cause amendment of the energy efficiency class. Contact the producer to acknowledge the energy efficiency class for the product with different parameters to those presented in the catalogue.