

Glacier SNGL-H/L DTO



STANDARD FEATURES


- working temperature: from -25°C to -21°C
- refrigerant: R744
- electrical defrosting
- 2 x NTC temperature probe
- siphoned condensate drains
- 5 rows of suspended wire shelves for SNGL H and 4 rows for SNGL L, on shelves and on air inlet price holders 39 mm
- exposition: zinc-plated steel, powder coated in white (RAL 9003)
- lighting: vertical in doors frame, LEDit CW-2
- framed doors without heaters
- perspex divider between doors
- color of the base – black (RAL 9005)

OPTIONS


- electronic expansion valve
- bumper
- sidewalls

Glacier SNGL-L3 2342 DTO

DTO – door | triple, straight | hinged

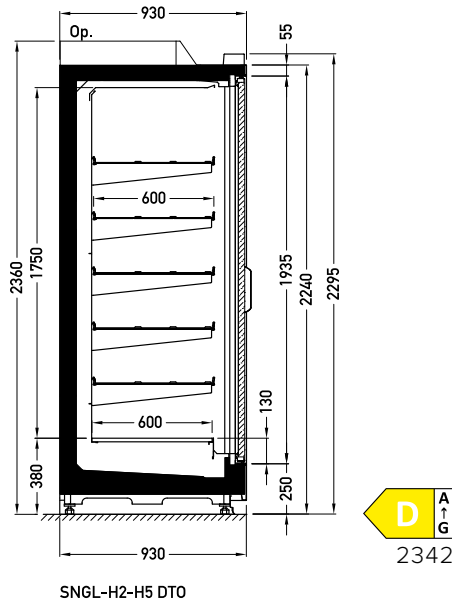

SNGL-H2-H5 DTO

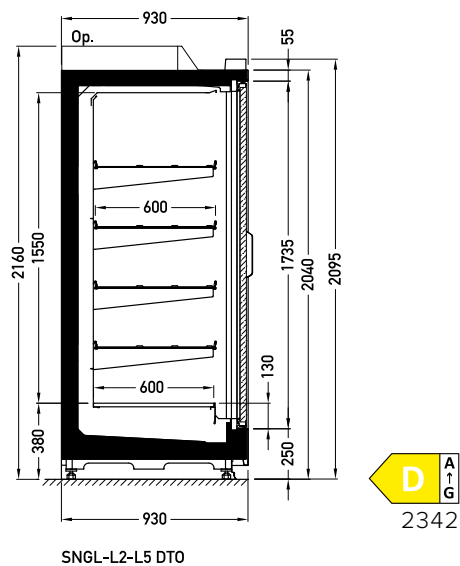

SNGL-L2-L5 DTO

AVAILABLE MODULES

H2-1564 H3-2342 H4-3123 H5-3898
L2-1564 L3-2342 L4-3123 L5-3898